


# Mechanical Detachable Gooseneck

Description: **48' x 8 1/2' Tandem 30**

**DOEPKER**  
INDUSTRIES LTD.

## Trailer Specifications

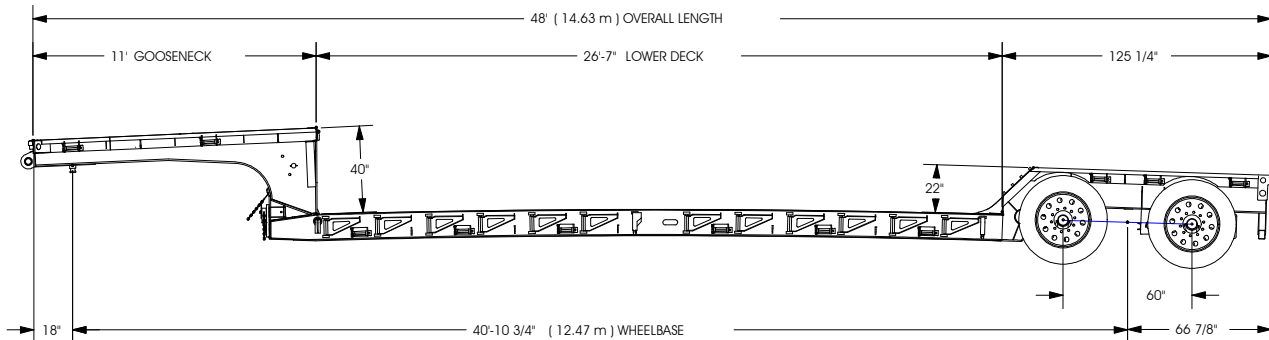

## Standard Equipment

### Distributed Load

- Approximately - weight over 16'

### Deck Height

- Approximately 20" laden

### Tare Weight

- Including standard equipment approximately 15,600 lbs c/w 12" outriggers

### General

- Main Beams - 4 Rail System
  - Inner rail web - 1/4 T1,
  - Inner rail flange 5/8 T1
  - Outer rail web - 3/16 high tensile, Outer rail flange 3/8 T1
- Crossmembers
  - Dimensions subject to lengths and ratings and types of extensions
  - Standard tubes fabricated
  - Standard W6 at 9 I-beam

- King pin at 18"

- Coupler plate 3/8"

- Rear impact guard where required

### Decking

- 2" rough fir plank on lower level
- 2" T&G on upper levels

### Lighting

- LED lights as per CMVSS
- Side signal lights
- Extra rear signal (red)

### Finish

- Fully sand blasted steel
- Zinc Rich Primer on complete steel outside
- PPG High Build Epoxy Primer
- PPG Acrycote topcoat - one color
- Reflective tape

### Suspension

- Air ride - HT 250
- Axles 77 1/2" track - 22,500 lb capacity

- Stemco seals

- 16 1/2" x 7" P20-20 linings with dust shields

- 30-30 spring brake

- 2S1M anti-lock brake system

- Auto slacks

- Air system per CMVSS

### Hubs, Rims & Tires

- 10 stud Cast Unimount hub and drum

- 22.5 - 10 hole steel

- unimount - powder coated white

- 255 70R 22.5 tires B.F.

- Goodrich ST230

\* Safety Certified