


Oil Field Float

Description: **50' x 8 1/2' Tridem**

DOEPKER
INDUSTRIES LTD.

Trailer Specifications

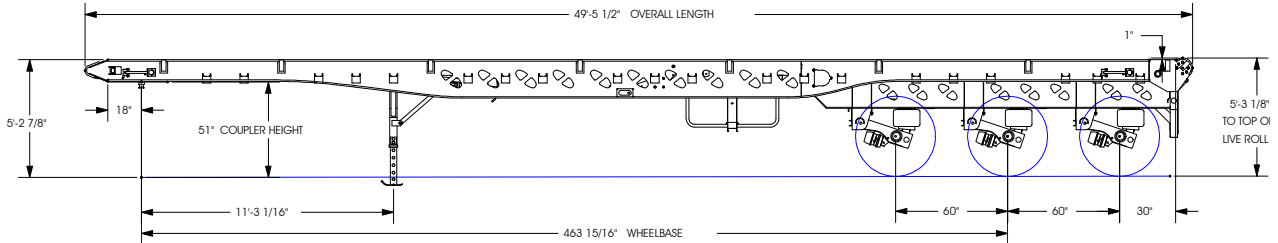

Standard Equipment

Distributed Load

- Approximately 45 ton over 20'

Tare Weight

- Including standard equipment approximately 20,900 lbs

General

- Main Beams - Outer Rail
 - Web: 1/4" high tensile 20 1/2" web
 - Flange: 3/4" x 6"
- Crossmembers
 - Size: 6" x 9" on 22" centers
- Coupler height range 52" to 58"
- 1 5/8" I.D. pin pocket - 11 per side
- Fold up style dolly legs
- Jost king pin at 18" setting
- Coupler plate 3/8"
- Mudflaps
- Oil Field Style Rear Bumper

- 3" rough fir decking
- Overall width 9"
- 10 x 7/8" wall live roll with 2 support rollers
- Full width pick up throat

Lighting

- LED lights as per CMVSS
- Side signal lights
- Extra rear signal (red)

Finish

- Fully sand blasted steel
- Zinc Rich Primer on complete steel outside
- PPG High Build Epoxy Primer
- PPG Acrycote topcoat - one color

Suspension

- Intraax AA-300
- Stemco seals
- 16 1/2" x 7" P20-20 linings with dust shields
- 30-30 spring brake

- 2S2M anti-lock braking system
- Auto slacks
- Air system per CMVSS
- Chain axle slings

Hubs, Rims & Tires

- 10 stud Cast Unimount hub and drum
- 22.5 - 10 hole steel unimount - powder coated white
- 11R/22.5 tubeless radials B.F. Goodrich ST220

* Safety Certified