


Steel Flat Deck

Description: **48' x 8 1/2' Tridem / 53' x 8 1/2' Tridem**



Trailer Specifications

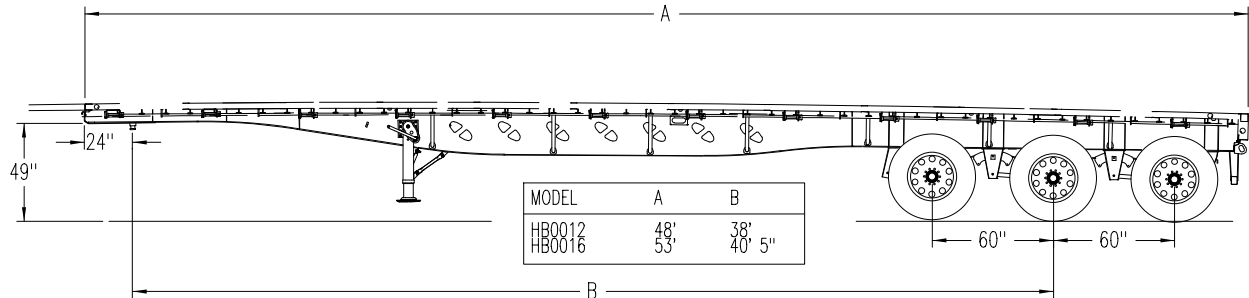

Standard Equipment

Main Rail Ratings:

- Distributed Load - approximately 75,000 lbs
- 10' Concentrated Load - approximately 60,000 lbs
- 4' Concentrated Load - approximately 50,000 lbs

Deck Height

- 53' approximately 57 1/2" at front and 55 1/2" at back
- 48' approximately 59" at front and 55 1/2" at back

Tare Weight

- Including standard equipment and winches approximately - 48' - 12,600 lbs; 53' - 13,400 lbs

General

- Main Beams - Center Rail
 - Web: 3/16" x 25 1/2" high tensile steel
 - Flange: 3/8" x 6" high tensile steel
- Crossmembers
 - 4" high tensile Jr. I-beam on 16" centers

- Stake pockets on 4' centers
- Side rail - 6" structural channel or tubing style
- Rear bumper - 10 gauge plate
- Jost 2 speed landing gear
- Jost king pin at 24"
- Coupler plate 1/4"

Lighting

- LED lights as per CMVSS
- Side signal lights
- Extra rear signal (red)

Decking

- 2" x 6" T & G fir

Finish

- Fully sand blasted steel
- Zinc Rich Primer on complete steel outside
- PPG High Build Epoxy Primer
- PPG Acrycote topcoat - one color

Suspension

- Intraax AA-230 air ride 23,000 lbs
- Stemco seals

- 16 1/2" x 7" P20-20 linings with dust shields
- 30-30 spring brake
- 2S2M anti-lock braking system
- Auto slacks
- Air system per CMVSS

Hubs, Rims & Tires

- 10 stud Cast Unimount hub and drum
- 22.5 - 10 hole steel unimount - powder coated white
- 11R/22.5 tubeless radials B.F. Goodrich ST220

Protective Features

- Mudflaps at back
- Rear impact guard where required

* Safety Certified