


5 Axle Logger (for 8' cross and 16' tiers – for full length)

Description: 48' x 8 1/2'

DOEPKER
INDUSTRIES LTD.

Trailer Specifications

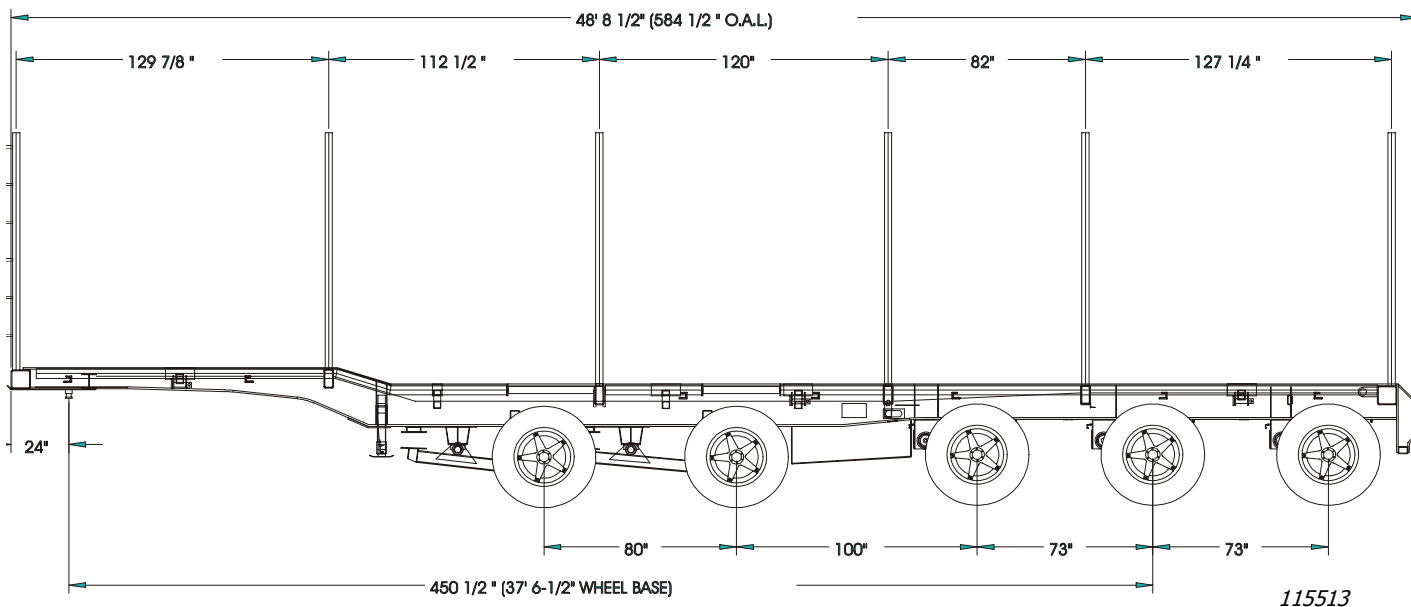

Tare Weight Upon Request

Standard Equipment

Main Beams

Flange and web – T-1 steel with dimensions subject to lengths and ratings

- * Floating crossmembers and bunks
- * Peg leg landing gear
- * KP-0412 removeable king pin
- * Coupler plate – 3/8"
- * Mudflaps in front of brake pots on all axles
- * Full heavy duty walkway
- * Winches – 3 driver side
- * Stakes – 12 – 3/16 x 3/16 QT400 tapered – standard
- * Bunks – 6 – 2 upper and 4 lower built-in style with 3" stake pocket
- * Chain tighteners
- * Chain slings on all axles

Lighting

- sealed beam per DOT specs
- cable wiring
- side signal lights
- Brake, side signal, and marker lights are LED
- extra rear signal (red)

Finish

- fully sand blasted
- PPG high Build Epoxy Primer
- PPG acrylicote - one colour
- reflective tape

Suspension

- HT 300 air ride
- 77 1/2" track – 25,000 lb. capacity
- 2S1M Anti-lock braking system
- Stemco seals
- 16 1/2" x 7" P20-20 linings with dust shields
- 30-30 spring brake
- Auto slacks
- Air system per CMVSS
- 10 stud cast Unimount hub and drum
- 22.5 10 hole steel Unimount – powder coated – white
- 11R 22.5 tubeless radial BF Goodrich ST565

*Safety Certified