


Standard Logger

Description: Tridem Straight Frame – Heavy Duty

DOEPKER
INDUSTRIES LTD.

Trailer Specifications

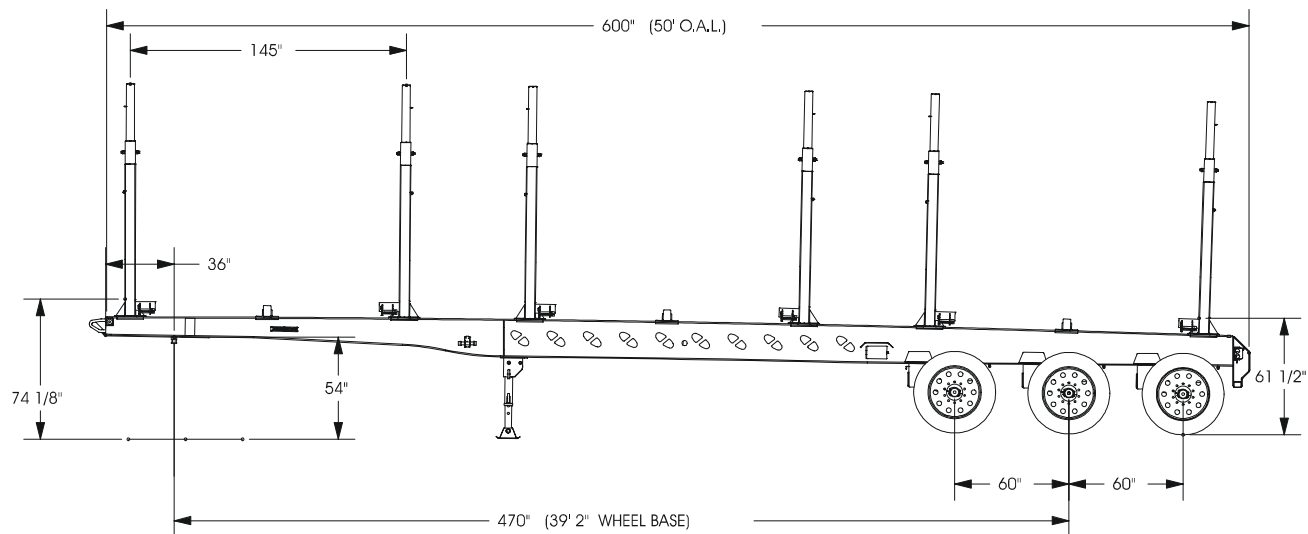

Tare Weight Upon Request

LO2026

Standard Equipment

Main Beams – Center Rail

Flange and web – T-1 steel with dimensions subject to lengths and ratings

Winches

- one on each bunk with hook opposite
- turned for easy operation

- * Mark V, 2-speed landing gear with Arctic grease
- * King pin
- * Coupler plate 3/8"
- * Mudflaps
- * Chain axle slings on all axles

Lighting

- sealed beam per DOT specs
- cable wiring
- Brake, side signal, and marker lights are LED

Finish

- fully sand blasted
- PPG high Build Epoxy Primer
- PPG acrylicote - one colour
- reflective tape

Suspension

- HT-300 – 15 air ride
- axles – 89 1/2" track, P23 x 750 wall, 25,000 lb. capacity
- 2S1M Anti-lock braking system on each unit
- Stemco seals
- 16 1/2" x 7" CM29 linings with dust shields
- Goldseal 30-30 spring brake
- auto slacks
- 10 stud cast unimount hub and drum
- air system per CMVSS
- 22.5 10 hole steel unimounts – powder coated – white
- 11R 22.5 tubeless radials B.F. Goodrich ST220

***Safety Certified**